




ASSURETEC

The World Leader in
Automated ID Authentication.™


i-Dentify ID-1501 Kiosk Authentication Scanner Product Information

i-Dentify™ ID-1501 The Most Powerful Kiosk Card Scanner For Document Authentication!


The ID-1501 is a ruggedized, high-resolution, duplex scanner that uses multiple light sources to provide the most comprehensive screening of any ID1-sized document in a single scan.

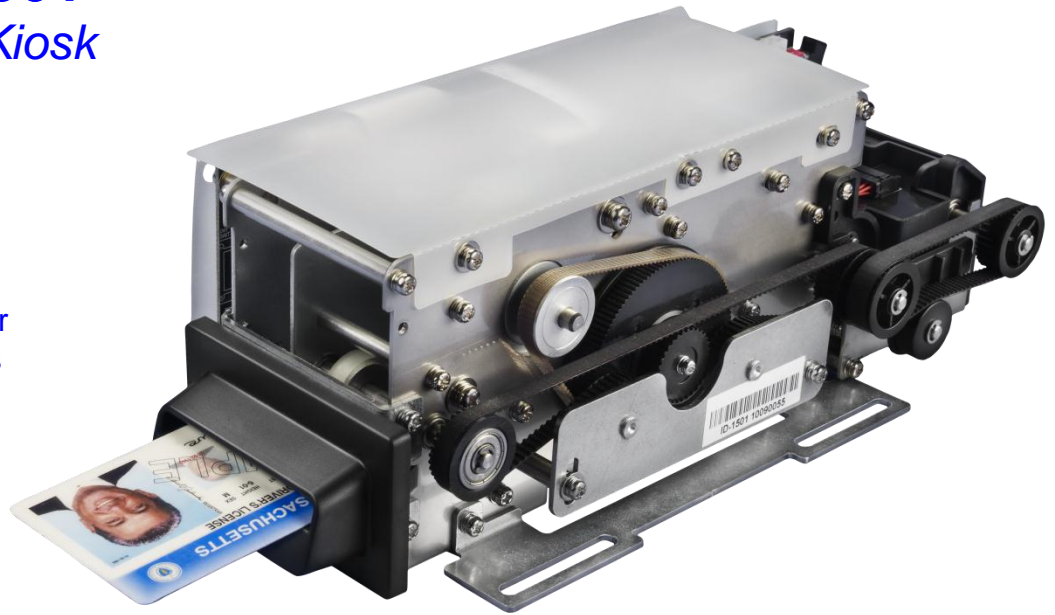


Full Color - Front

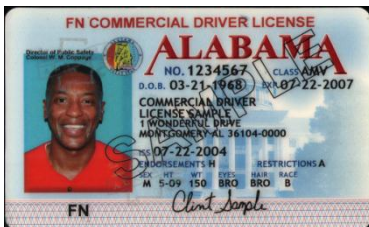

Full Color - Back

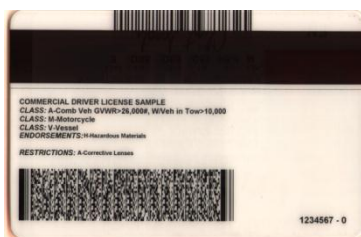

Near-Infrared

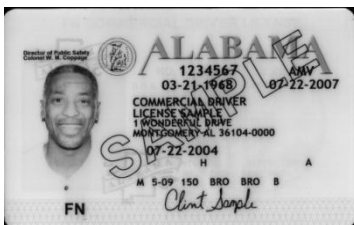

Features Includes:

High-Resolution Scanning

600 dpi resolution provides micro print detection capability.

Improved Efficiency

Patented technology delivers front and back full color RGB and near-infrared scans in one operation.

Accurate Data Extraction

Read and extract data from front and back of ID including barcode and magstripe in a single scan.

Reliability

Quality components ensure reliable long term use and holds up well to wear and tear.

Covered by AssureTec U.S. Patents 6,786,405 and 7,110,573

North America

AssureTec Technologies, Inc,
200 Perimeter Road,
Manchester, NH 03103
Phone: 603.641.8443
Fax: 603.641.9535
Web: www.assuretec.com

Europe

London, UK
Phone:+44 (0)1727
831428



ASSURETEC

The World Leader in
Automated ID Authentication.™

i-Dentify ID-1501 Card Authentication Scanner Product Information

i-Dentify™ ID-1501 Hardware Specification

ID Card Size

Width 53.5-54.9mm (ISO specification 53.92 – 54.18)
Length 85-86mm (ISO specification 85.47-85.90)
Thickness 0.4 – 1.0mm (ISO specification 0.68 – 0.84)

| | |
|----------------------|--|
| Scanning Side | Duplex |
| Illumination | Front: RGB (470/530/620nm) Rear: RGB (465/520/630nm) Near-Infrared (880nm) |

| | |
|---------------|---------------|
| Sensor | |
| Front | Color/NIR CIS |
| Rear | Color CIS |

| | |
|-------------------|------|
| Scan Width | 54mm |
|-------------------|------|

| | |
|-------------------|-----------------------------|
| Resolution | 300/600 dots per inch (DPI) |
|-------------------|-----------------------------|

| | |
|--------------|--|
| Color | 8-bit grayscale, 1 bit B/W; 24-bit RGB color |
|--------------|--|

| | |
|-------------------|-------------------------------------|
| Scan Speed | 42mm/sec @ 600dpi; 84mm/sec @300dpi |
|-------------------|-------------------------------------|

| | |
|-------------------------------------|--|
| Magnetic Stripe Reader Track | ISO7811 3 Track, US/Canada Driver License format (AAMVA) |
|-------------------------------------|--|

| | |
|-----------------------|------------------------------|
| Interface Type | USB 2.0 High Speed (480Mbps) |
|-----------------------|------------------------------|

| | |
|-------------|--------------------------|
| Size | 118W x 293.2D x 88H (mm) |
|-------------|--------------------------|

| | |
|---------------|-------|
| Weight | 1.7kg |
|---------------|-------|

| | |
|--------------------|--------------|
| Power Input | DC24V, 1.75A |
|--------------------|--------------|

| | |
|--------------------|--|
| Environment | |
| Operating | 0 - 40 °C; 10 - 85% RH, non-condensing |
| Storage | 7 - 49 °C; 10 - 98% RH, non-condensing |

| | |
|------------------------|---|
| Radio Frequency | This device complies with part 15 of the FCC Rule |
|------------------------|---|

| | |
|---------------------|--|
| Interference | Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. |
|---------------------|--|

North America
AssureTec Technologies, Inc,
200 Perimeter Road,
Manchester, NH 03103
Phone: 603.641.8443
Fax: 603.641.9535
Web: www.assuretec.com

Europe
London, UK
Phone:+44 (0)1727 831428